ALL-PRO

Catalog #	Type
Project	
Comments	
Prepared by	Date

DESCRIPTION

The ET400LV is a small aperture low voltage housing for providing accent and task lighting.

APPLICATION

The ET400LV is designed for use in non-insulated ceiling or for insulated ceilings but insulation must be kept 3" from all sides of the housing.

DESIGN FEATURES

A···Housing
Die-stamped 20 gauge CRS with Gray powder coat finish.

B···Plaster Frame
Housing is secured in plaster frame with spring barbs. The housing can be adjusted in the plaster frame to adjust for different ceiling materials. The housing can be removed from the plaster frame to provide access to the junction box.

C···Junction Box
U.L. listed for through branch circuit wiring. Positioned to accommodate straight conduit runs. Four conduit knockouts are uniform 1/2" size with true pryout slots. Four Romex pryouts with integral strain relief also included.

D···Bar Hangers
Pre-installed, captive bar hangers allow housing to be positioned at any point within a 24" joist span. Bar hangers can be repositioned 90°.

E···Transformer
120V Integral magnetic transformer steps line voltage down to lamp operating voltage. For lamps up to 50W.

F···Thermal Protector
Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Labels
- UL Listed for Damp Location
- UL listed for Feed Through
- CSA Certified

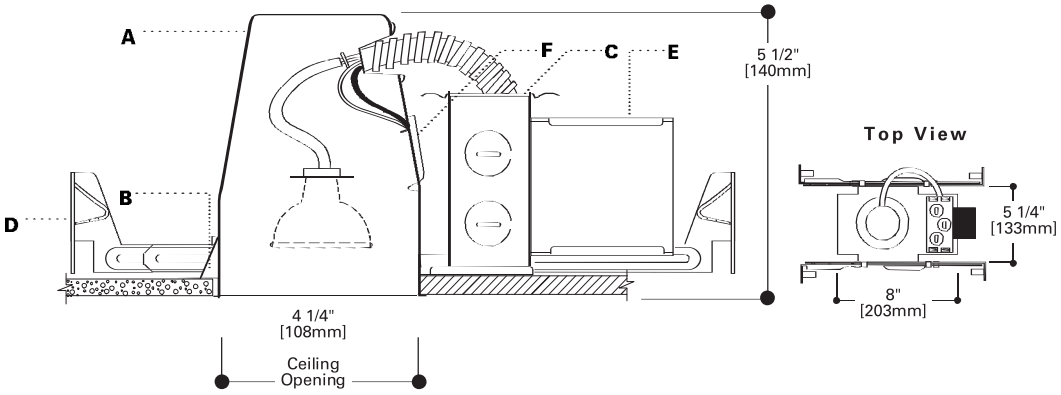



ET400LV

4" Non Insulated Ceiling Low Voltage Recessed Housing

4" TRIMS

FOR USE IN NON-INSULATED CEILINGS OR INSULATED CEILINGS BUT INSULATION MUST BE KEPT 3" FROM ALL SIDES OF FIXTURE

ORDERING INFORMATION

SAMPLE NUMBER: ET400LV-403LV
Order housing, trim and accessories separately.

Housing

ET400LV=4" Non-Insulated Ceiling Small Aperture Low Voltage Housing

Trims

ERT403LV
Reflector Cone
50W 12V MR16
ERT403LV=Specular Clear Reflector, White Trim Ring
ERT403LVG=Specular Gold Reflector, White Trim Ring
OD: 5" (127mm)

ERT401LV
Baffle
50W 12V MR16
ERT401LV=Black Baffle, White Trim Ring
ERT401LVW=White Baffle with White Trim Ring
OD: 5" (127mm)

ERT402LV
Eyeball
50W 12V MR16
ERT402LV=White Eyeball, Black Baffle
OD: 5" (127mm)

ERT404LV
Slot Aperture
50W 12V MR16
ERT404LV=White Trim
OD: 5" (127mm)

ADV042436
Supersedes ADV031775 & ADV000393

Note: Specifications and Dimensions subject to change without notice.

Visit our web site at www.cooperlighting.com

COOPER Lighting

Customer First Center 1121 Highway 74 South Peachtree City, GA 30269 770.486.4800 FAX 770 486.4801
Cooper Lighting 5925 McLaughlin Rd. Mississauga, Ontario, Canada L5R 1B8 905.507.4000 FAX 905.568.7049